





M100 JC H TAN

Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com



3 POWERFUL BY-PASS MOTORS

120V | 60 Hz
Max Airflow= 336 CFM
Max Depression= 98 inH2O



**STANDARD H 14
HEPA FILTER**
4340 in²



**TANGENTIAL
INLET WITH
SLIDING DAMPER**

Used in combination with
the Jet Clean system

Conical polyester
cartridge filter
M CLASS



5425 in²



**JET CLEAN
CLEANING SYSTEM**

Clean the filter with a powerful jet
of air without stopping the unit.



26 gal
Bin capacity


**METAL SLEEVE
FILTER PROTECTION**

The metal sleeve, surrounding
the filter, protects it from the dust
entering the vacuum chamber.

**EFFICIENT
CYCLONIC EFFECT**

The dust, entering the vacuum,
experiences a cyclonic effect that slows
down the powder making it fall into the
Longopac® bagging system.

DEPURECO EXCLUSIVE CYCLONIC SYSTEM

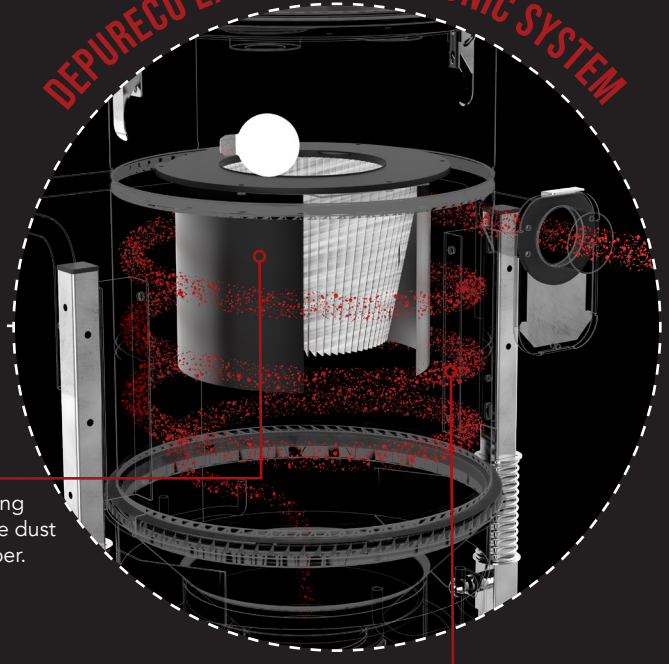

SPEC SHEET

	Units	M 100 JCH TAN
Motors Type		3 - By-Pass
Power	HP	3.3
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	336
Inlet	Ø in	2.75
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	26
Dimensions	in	25.98 X 31.50
Height	in	59.65
Weight	lb	154
Primary filter		
Type		Star filter
Surface area Diameter	in² in	3720.01
(Class EN 60335-2-69)		M Class
Media		Polyester
Filter cleaning		Manual shaker
Absolute filter		
Surface area	in²	4,340
(Class - EN 1822)		H14
Media		Fiberglass

OPTIONAL



AB
Accessory basket



GRD
Grounding

OPTIONAL FILTERS



CONICAL POLYESTER
Hepa 13

ACCESSORIES



STEEL CONNECTOR
2.75 / 2 in



Wet & Dry Kit
Ø 2 in



Starter Kit
Ø 2 in